

Impact Factor:

ISRA (India) = 6.317
ISI (Dubai, UAE) = 1.582
GIF (Australia) = 0.564
JIF = 1.500

SIS (USA) = 0.912
ПИИИ (Russia) = 3.939
ESJI (KZ) = 9.035
SJIF (Morocco) = 7.184

ICV (Poland) = 6.630
PIF (India) = 1.940
IBI (India) = 4.260
OAJI (USA) = 0.350

SOI: [1.1/TAS](#) DOI: [10.15863/TAS](#)

International Scientific Journal Theoretical & Applied Science

p-ISSN: 2308-4944 (print) e-ISSN: 2409-0085 (online)

Year: 2021 Issue: 10 Volume: 102

Published: 23.10.2021 <http://T-Science.org>

QR – Issue



QR – Article



Nodirbek M. Oripov

Fergana Polytechnic Institute
Assistant, Department of Natural Fibers,
Fergana, Uzbekistan

THEORETICAL STUDY OF THE PROCESS OF CLEANING COTTON BEFORE PILING UP

Abstract: The article examines the structures of cleaners describing the separation of large and small weed impurities from the cotton mass, will determine the parameters for calculating the cleaning effect of having an elastic bond with cotton.

Key words: cotton, technology, theory, equation, force, model, fibre.

Language: English

Citation: Oripov, N. M. (2021). Theoretical study of the process of cleaning cotton before piling up. *ISJ Theoretical & Applied Science*, 10 (102), 801-806.

Soi: <http://s-o-i.org/1.1/TAS-10-102-87> **Doi:**  <https://dx.doi.org/10.15863/TAS.2021.10.102.87>

Scopus ASCC: 2500.

Introduction

The optimal number of working bodies for pile and saw drum cleaners are 6-14 and more, and its further increase does not increase the cleaning efficiency. At the same time, the number of drums in the pile drum cleaner, which is the first cleaner in the technological process, does not exceed 6 when cleaning low-grade raw cotton. It should also be taken into account that the harvesting of seed cotton by machine harvesting leads to an increase in the number of contaminants in it. The degree of contamination of raw materials collected in machine harvesting is from 8% to 30%, and higher mostly picked with a cotton swab. This underscores the need to improve the technique and technology of ginning cotton before the ginning process.

In the currently available technologies, after ginning, the seed cotton is cleaned from small impurities and then from large impurities. Pile drum cleaners are used for cleaning small contaminants, and sawdust drum cleaners are used for large contaminants. Considering that mechanical cleaning can damage the fibre and seeds, great attention is paid to the selection of the optimal number of seed cotton and fibre cleaning (the number of cleaning refers to the number of saw drums involved in cleaning the seed cotton).

This can be understood as follows. Experts have obtained graphs of the dependence of fibre classes (varieties) on the number of cleaning drums when changing the appearance of fibre by hand and machine-picked cotton. The fibre class (type) increases significantly when the number of cleaning drums increases from 1 to 6; As it increases from 6 to 12, the cleaning intensity decreases. Further increase in the number of drums does not lead to an improvement in fibre quality Table 3.12. However, as the number of cleaning drums increases, the quality of the fibre deteriorates as a result of the negative impact of the mechanical processing of the fibre. If the number of cleaning drums is not increased too much when processing for machine-picked cotton, the deterioration of the appearance of the fibre will not be noticeable. As the number of cleaning drums increases, the appearance of the fibre deteriorates the micronaire performance. It is necessary to minimize the mechanical impact on the process by maximizing the cleaning of the technological process of processing of seed cotton with the working bodies, as well as the rational placement of cleaners and reducing the number of transport devices.

Experiments were conducted to study the impact of fibre on quality indicators as a result of increasing the number of drums for cleaning raw cotton in the coordinated technological process of the enterprise.

Impact Factor: ISRA (India) = 6.317 SIS (USA) = 0.912 ICV (Poland) = 6.630
 ISI (Dubai, UAE) = 1.582 ПИИИ (Russia) = 3.939 PIF (India) = 1.940
 GIF (Australia) = 0.564 ESJI (KZ) = 9.035 IBI (India) = 4.260
 JIF = 1.500 SJIF (Morocco) = 7.184 OAJI (USA) = 0.350

The test used And-35, a variety of raw cotton, its initial quality indicators: industrial-grade III, class 2,

moisture 12.5%, impurity 11.9%, maturity 0.7%, the degree of mechanical damage to the seed 1.5%.

Table 1. The following table shows the interaction between fibre qualities as a result of the increase in the number of cleaning drums.

Selection industry Types	Mechanical of seeds %			damage	Short fibre content %			Staple	weight	length of fibre, mm	Mass of defective and dirty mixtures, %		
	4	8	12		4	8	12				4	8	12
C-6524 II/2	1.9	1.9	2.1	7.7	7.7	7.9	32.4	32.2	32.2	2.3	2.3	2.4	
And-35 III/2	3.7	3.8	3.9	9.5	9.0	9.8	31.3	31.2	31.1	3.9	3.9	3.9	
And-35 IV/2	5.1	5.1	5.6	12.	12.5	12.2	30.4	30.1	30.0	8.5	8.6	8.7	

Mechanical damage to the seed%, short fibre content %, fibre staple length mm in mm, mass fraction of defective and dirty mixtures%, when the number of cleaning drums is 6-8-12 in different selection varieties of raw cotton, with a working capacity of 5 tons/hour, the following are shown in the graphs. (Figure 1.1)

The selected raw cotton in each selection and industrial variety was carried out 3 times on experimental equipment, samples of raw cotton cleaned in the technological process were taken and laboratory analysis was carried out.

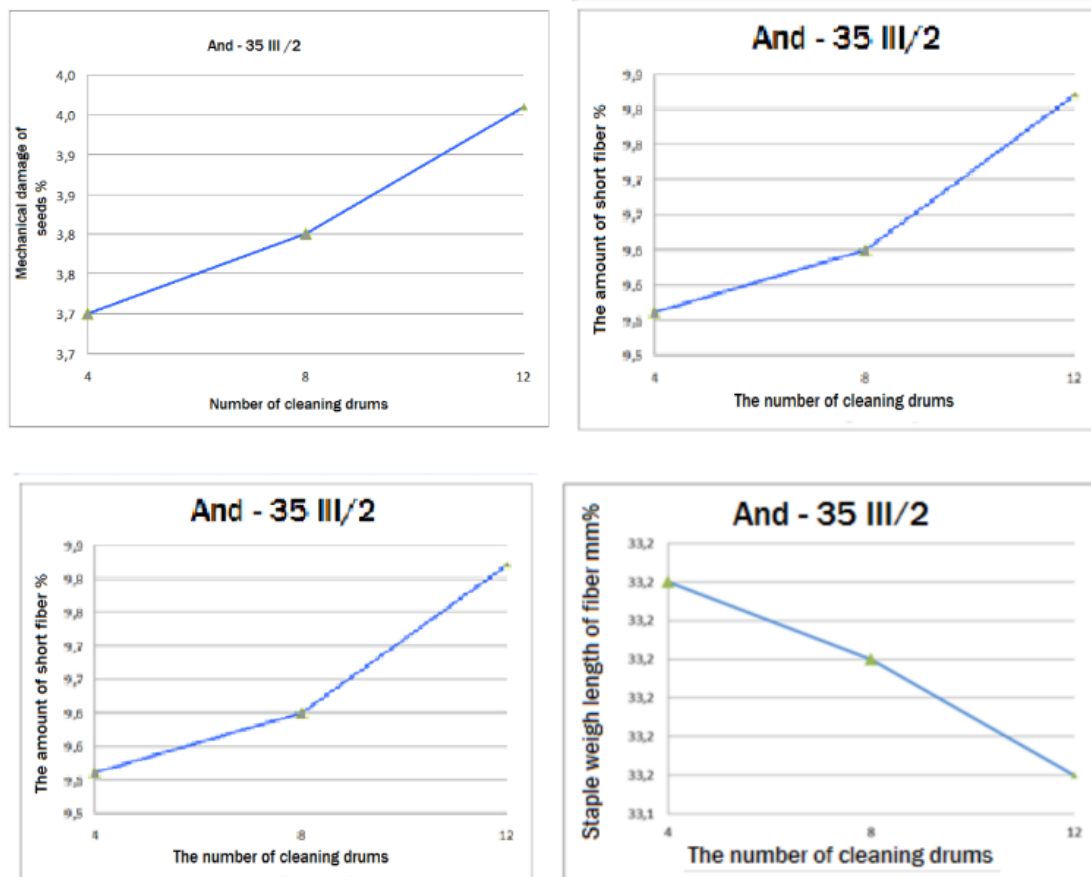


Figure 1. Mechanical damage to the seed, the amount of short fibre, the staple weight length of the fibre in mm, the mass fractions of defects and contaminants are given.

The results of the analysis show that the effect of cleaning frequency on cleaning performance at different work efficiencies is shown in the graph,

when the number of drums for cleaning raw cotton increases from 4 to 12 at 5 t/h, mechanical damage to seeds from 3.70% to 3.96%; short fibre size, 9.51% to

Impact Factor:

ISRA (India) = 6.317
 ISI (Dubai, UAE) = 1.582
 GIF (Australia) = 0.564
 JIF = 1.500

SIS (USA) = 0.912
 ПИИИ (Russia) = 3.939
 ESJI (KZ) = 9.035
 SJIF (Morocco) = 7.184

ICV (Poland) = 6.630
 PIF (India) = 1.940
 IBI (India) = 4.260
 OAJI (USA) = 0.350

9.82%; staple weight length of fibre from 31.35 mm to 31.15 mm; the mass of defective and contaminated compounds increased from 3.90% to 3.99%. Subsequent experimental work used S-6524, II-nav.2-class. 2-grade raw cotton, its initial quality indicators: moisture 10.5%, contamination 9.6%, mechanical damage to the seed 1.90, from 1.98%; short fibre, from 7.70% to 7.93%; staple weight length of fibre from 32.40 mm to 32.20 mm; the mass of defective and contaminated compounds increased from 2.30% to 2.47%.

And-35, IV-nav.2-class cotton raw material variety was used, its initial quality indicators:

moisture 14.5%, contamination 15.5% mechanical damage of seeds from 5.10,% to 5.63%; short fibre, from 12.50% to 12.72%; staple weight length of fibre from 30.45 mm to 30.05 mm; the mass of defective and contaminated compounds increased from 8.50% to 8.76%. When analyzing the results obtained, we can see a decrease in quality indicators as a result of the mechanical processing of raw cotton and its fibre products in the coordinated technological process of the ginnery. It is obvious that in the cleaning of low-grade and high-pollution cotton is the maintenance of quality and the introduction of its technology.

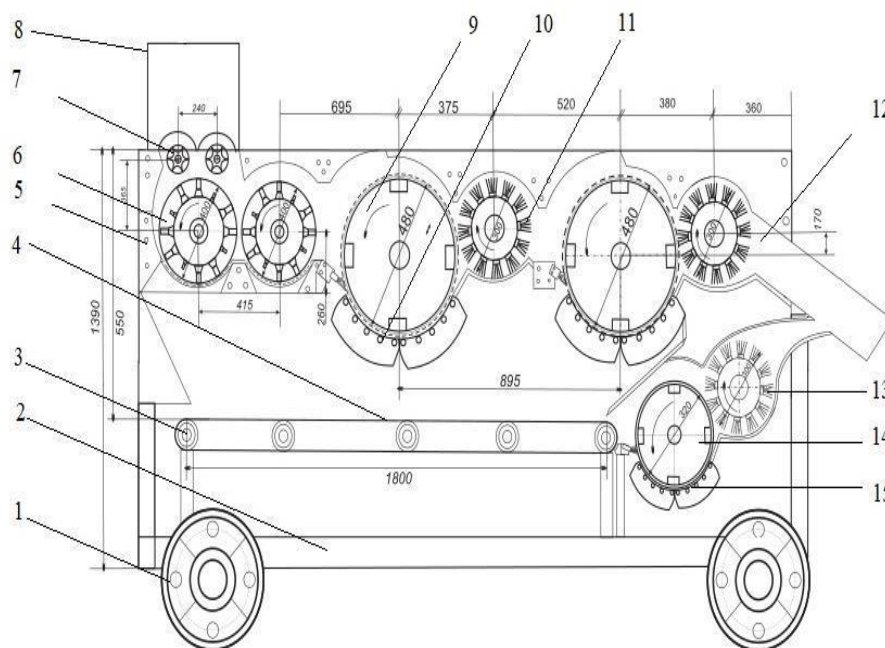


Figure 2. Schematic diagram of a cotton cleaning machine.

1 wheel, 2 device base, 3 collecting tape, 4 rollers, 5 mesh surface, 6 pile drum, 7-pile supplier, 8-pile receiving hopper, 9-ply drum, 10-ply grate, 11-ply drum, 12-pound cotton pipe, 13-ply drum, 14-ply drum, 15-ply ribbed grid.

Flow 1-XP (RX-1), EN 177 saw sections, UXK cotton ginning units. The EN 177 saw section is the main part of the 1XP ginnery and 1RX regenerators, and the high-impurity cotton raw material is fully processed by this technological process.

To clean the normal cleaning sections of cotton, the 3UXK unit with parallel-mounted cotton cleaning

units is combined, the interchangeable UXK has 6 sections, 6 pile connections and 1 XK cleaner located in the last block.

The research and testing were carried out based on the "Coordinated Technology of Cotton Processing (PDQI-2016)", which has been used in the ginning industry of the Republic of Uzbekistan since 2016.

Table 2. Structural quality indicators of cotton fibre obtained from production according to the sequence scheme of the technological process

Sequence diagram of the technological process	Composite quality indicators of cotton fibre obtained from production						
	Breeding and industrial-grade S-6524 II / 2						
	Starting pollution, %	Total defects, %	Minor pollution	Ulyuk %	Broken seeds, %	Fibrous bark, %	Spun fibre, %
SS-15A 2SB-10 UXK DPZ-180	9,60	4,42	1,14	0,93	0,69	1,01	0,07

Impact Factor:

ISRA (India) = 6.317	SIS (USA) = 0.912	ICV (Poland) = 6.630
ISI (Dubai, UAE) = 1.582	ПИИИ (Russia) = 3.939	PIF (India) = 1.940
GIF (Australia) = 0.564	ESJI (KZ) = 9.035	IBI (India) = 4.260
JIF = 1.500	SJIF (Morocco) = 7.184	OAJI (USA) = 0.350

MKO new SS-15A 2SB-10 UXK DPZ-180	4,50	2,85	0,96	0,91	0,65	0,98	0,05
--------------------------------------	------	------	------	------	------	------	------

The technological process of the ginning industry was carried out according to the sequence scheme, selection and industrial varieties S-6524 II/2 according to the guidelines for determining the quality of cotton fibre from production and determined based on the following tables and graphs Table 3.13. Selection variety S-6524, industrial-grade second grade, initial contamination rate of second-grade cotton raw material -9.6%; humidity level-10.5%. Before washing, the cleaning efficiency was 4.5% when the cleaning process was performed on the

newly introduced device, i.e. the cleaning efficiency was 53.1%. (Figure 1.4). After the cleaning process of S-6524 II/2 industrial grade cotton, the amount of fine defects is cleaned from 4.42% to 2.85%, the total amount of fine impurities is from 1.14% to 0.96%, the amount of fibrous fibre is from 0.93% to 0.91%, the amount of broken seeds is from 0.69% to 0.65%, The decrease in fibre seed husk from 1.01% to 0.98%, the amount of spun fibre from 0.07% to 0.05%, the increase in the quality of fibre products was determined based on the analysis.

Table 3. Structural quality indicators of cotton fibre obtained from production according to the sequence scheme of the technological process

Sequence diagram of the technological process	Composite quality indicators of cotton fibre obtained from production						
	Breeding and industrial-grade And-35 III/2						
	Starting pollution, %	Total defects, %	Minor pollution	Ulyuk %	Broken seeds, %	Fibrous bark, %	Spun fibre, %
SS-15A 2SB-10 UXK DPZ-180	11,90	5,19	1,19	1,16	0,83	1,28	0,12
MKO new SS-15A 2SB-10 UXK DPZ-180	5,40	3,46	1,05	0,98	0,76	1,06	0,09

Selection variety And-35, industrial-grade third grade, initial contamination rate of second-grade cotton raw material 11.9%; humidity level 13.5%; Before cleaning, the cleaning efficiency in the newly introduced device was 5.4%, ie the cleaning efficiency was 54.6%. The results of the comparative study show that after the cleaning process of And-35 III / 2 industrial grade cotton, the number of fine defects is

5.19% to 3.46%, the amount of fine impurities is 1.19% to 1.05%, the amount of fibrous fibre is 1.16% to 0.98%, the amount of broken seeds is 0.83. from 0.76 per cent, fibrous seed husk from 1.28 per cent to 1.06 per cent, and the amount of spun fibre from 0.12 per cent to 0.09 per cent, which led to an increase in the quality of fibre products.

Table 4. Structural quality indicators of cotton fibre obtained from production according to the sequence scheme of the technological process

Sequence diagram of the technological process	Composite quality indicators of cotton fibre obtained from production						
	Breeding and industrial-grade And-35 IV / 2						
	Starting pollution, %	Total defects, %	Minor pollution	Ulyuk %	Broken seeds, %	Fibrous bark, %	Spun fibre, %
SS-15A 2SB-10 UXK DPZ-180	15,50	8,63	2,45	1,87	1,36	2,14	0,23
MKO new SS-15A 2SB-10 UXK DPZ-180	6,80	4,94	1,67	1,63	1,21	1,90	0,16

Impact Factor:	SISRA (India) = 6.317	SIS (USA) = 0.912	ICV (Poland) = 6.630
	ISI (Dubai, UAE) = 1.582	ПИИИ (Russia) = 3.939	PIF (India) = 1.940
	GIF (Australia) = 0.564	ESJI (KZ) = 9.035	IBI (India) = 4.260
	JIF = 1.500	SJIF (Morocco) = 7.184	OAJI (USA) = 0.350

Selection variety And-35, industrial-grade fourth grade, the second-grade cotton raw material has an initial contamination rate of 15.5% and a moisture content of 13.5%. Before cleaning, the cleaning efficiency of the newly introduced device was 6.8%, ie the cleaning efficiency was 56.1%. The results of the comparative research test show that after the

cleaning process of And-35 IV / 2 industrial grade cotton, the amount of fine defects is 8.63% to 4.94%, the amount of fine impurities is 2.45% to 1.67%, the amount of fibre is 1.87% to 1.63%, the amount of broken seeds is 1.36. Based on the analysis, it was found that the quality indicators improved due to a decrease of 1.21 per cent.

Table 5. The new device shows the effect of the distances between the saw drum and the ribbed grids on the cleaning efficiency and quality level of the cotton.

Selection and industrial variety	Cotton pollution level,%	The distance between the saw and the rib mm device	Work efficiency, t/s	Device cleaning efficiency, %	The amount of raw cotton in the waste, %	The amount of raw cotton in the waste, relative to the total amount of ginned cotton, %	Mechanical damage to seeds, %
S-6524 II/2	8.3	12-14	3.0	48	4.4	0.1	1.98
	9.6	14-16	3.0	53.1	4.5	0.3	1.99
	9.4	16-18	3.0	55.3	4.7	0.2	1.97
And-35 III/2	11.5	12-14	2.8	51.3	4.8	0.4	3.81
	11.9	14-16	2.8	54.6	4.9	0.5	3.85
	11.7	16-18	2.8	55.5	4.9	0.6	3.86
Анд-35 IV/2	14.7	12-14	2.5	51.0	5.3	0.5	
	14.7	14-16	2.5	56.1	5.6	0.6	5.15
	15.5	16-18	2.5	55.7	5.5	0.5	5.19

The results of a comparative study obtained during the technological treatment of raw and unpolluted cotton from the Garam area are given above. The device, which was introduced into production in a new design, allows to carry out pre-ginning cleaning of cotton, the use of new technology in ginning plants, the loss of raw materials while maintaining the quality of cotton products within the norm, reducing fuel and electricity consumption and ensuring a high level of revenue from the sale of fibre at the end of production. In summary, after cleaning processes of industrial varieties S-6524 II / 2, And-35 III / 2, And-35 IV / 2, it was found that the cleaning efficiency from small, large and general defects is high.

Based on a small sample of cotton fibre, the traditional methods of testing using a tool were identified, in which a test sample was obtained by repeatedly averaging and reducing the number of samples selected from different locations after fibre cleaning machines. These methods are used in the assessment of the quality of cotton fibre, in the work of breeders, cotton gins and textile enterprises in the quality control of products in the technological process. [3] The following table shows the methods for determining the fibre quality of fibre products obtained from production in the laboratory system HVI 900 SA of Namangan regional laboratory by length, toughness, elongation at break, micronaire, colour and contamination.

Table 6. Republican Center for Certification of Cotton Fiber "Sifat", Namangan regional laboratory Results of production of fibre products in the laboratory system HVI 900 SA

Selection and industrial grade	High average length (UHML) mm, inch	Micronaire Indicator (Mic),%	Specific tensile strength Strength (Str), cN/tex	Light reflection coefficient Reflectance (Rd),%	Yellowness Rate Yellowness + b),	Trash code (T),%	Short fibre index (SFI), mm	Long same Index (Unf), %
And-35 III/2	(28.7)1.13	5.2	37.8	66.5	8.0	13	9.8	82.8
And-35 III/2	(28.9)1.14	5.1	36.9	66.3	8.2	19	12.2	81.6
And-35 III/2	(28.1)1.11	5.2	39.1	67.7	7.9	11	8.1	83.6
And-35 III/2	(28.8)1.14	5.2	35.9	66.1	8.6	18	9.8	83.5
And-35 III/2	(29.8)1.17	4.9	39.7	66.6	7.7	14	7.0	83.4
And-35 III/2	(28.0)1.10	5.0	35.4	67.6	7.8	15	13.3	81.0

Impact Factor:	ISRA (India) = 6.317	SIS (USA) = 0.912	ICV (Poland) = 6.630
	ISI (Dubai, UAE) = 1.582	ПИИИ (Russia) = 3.939	PIF (India) = 1.940
	GIF (Australia) = 0.564	ESJI (KZ) = 9.035	IBI (India) = 4.260
	JIF = 1.500	SJIF (Morocco) = 7.184	OAJI (USA) = 0.350

S6524 II/2	(29.8)1.17	5.1	43.1	67.4	8.3	13	7.9	84.0
S6524 II/2	(29.601.16	4.9	41.1	69.9	7.4	13	8.9	83.5
S6524 II/2	(29.3)1.15	4.9	39.2	68.7	7.6	10	10.8	83.3
S6524 II/2	(29.8)1.17	4.9	41.2	70.7	7.3	15	13.3	81.0
S6524 II	(29.3)1.15	5.0	39.3	67.5	7.6	9	10.2	83.1

Conclusions

Studies have shown that during the movement of raw materials along the mesh surface, a contact force is formed between the organic particles in the cotton and the mesh surface, under the influence of which a flash occurs, resulting in reduced productivity and a negative impact on cotton quality. Proper organization

and introduction of equipment in the technological process will reduce the level of damage to raw cotton, which will significantly increase the economic efficiency of the enterprise. In addition, uniformity in Unf-length indicates a decrease in short fibres in the free fibre content, an increase in specific tensile strength, and an increase in Elg-length elongation.

References:

- Sevostyanov, A.G. (1984). *Modeling of technological processes*. (p.344). Moscow: Legkaya and pishchevaya promyshlennost.
- Ticha, M. B., Haddar, W., Meksi, N., Guesmi, A., & Mhenni, M. F. (2016). Improving dyeability of modified cotton fabrics by the natural aqueous extract from red cabbage using ultrasonic energy. *Carbohydrate polymers*, 154, 287-295.
- Ergashev, Yu., Turdiyev, X., Oripov, J., & Xusanova, Sh. (2018). *Chigitli paxtani mayda iflosliklardan tozalash texnologiyasini takomillashtirish*. Ilmiy-amaliy anjuman materiallari.
- Getchell, N. F. (1955). Cotton Quality Study: III: Resistance To Soiling. *Textile Research Journal*, 25(2), 150-194.
- Korabel'nikov, A. R., Lebedev, D. A., & Shutova, A. G. (2012). Vydelenie sornyh primesej s poverhnosti sloja voloknistogo materiala. *Zhurnal «Tehnologija tekstil'noj promyshlennosti*, (4), 340.
- Sevost'janov, A. G. (1980). *Metody i sredstva issledovanija mehaniko-tehnologicheskikh processov tekstil'noj promyshlennosti*.
- Zikriyoev, E.Z. (1999). Textbooks under the general editorship. *Primary processing of raw cotton*. (pp. 258-269). Tashkent: Labor.
- Muradov, R. (2005). *Ways to improve the efficiency of the cotton separator*. (pp.62-63). Namangan edition.
- Soloxiddinov, J. Z. (2021). The Effect Of The Cylinder Rotation Frequency On The Carding. *Scientific and technical journal of NamIET*, pp.149-155.
- Isaev, S. S., Yu, E., Oripov, N., & Xakimov, I. (n.d.). Study of the Effect on the Natural Characteristics of Fiber in the Process of Application of Cotton Processing Technology. *International Journal of Innovations in Engineering Research and Technology*, 7(12), 111-116.